
#### SWSL1212HD

## **Self-Propelled Scissor Lifts**

# **SUNW**ÁRD

•		
Dimension		
Working height*		39' 4.4" (12m)
A	Platform height maximum	32'10" (10m)
В	Platform height (stowed)	4'5" (1.35m)
C	Platform length	7'5.5" (2.27m)
	Slide-out platform extension deck	3' (0.9m)
D	Platform width	3'7" (1.1m)
E	Stowed height (rails up)	8'0.5" (2.45m)
	Stowed height (rails down)	5'11" (1.8m)
F	Overall length	8'1" (2.47m)
G	Overall width	3'10" (1.17m)
Н	Wheelbase	6'1.6" (1.87m)
I	Ground clearance (stowed)	0.75" (0.02m)
J	Ground clearance (raised)	4.3" (0.11m)
Performance		
Lift capacity		700 lb (320kg)
Lift capacity(extension deck)		250 lb (113kg)
Max.platform pccupancy (indoor/outdoor)		2/1

700 lb (320kg)
250 lb (113kg)
2/1
2 mph (3.2km/h)
0.5 mph (0.8km/h)
3.94" (0.1m)
7'3'' (2.2m)
55s / 37s
25%
Proportional
<b>Dual front wheel</b>
Dual rear wheel
15×5 (381mm×129mm)
4×6V/240Ah
24V/30A
5.3gal
6327 lb (2870kg)

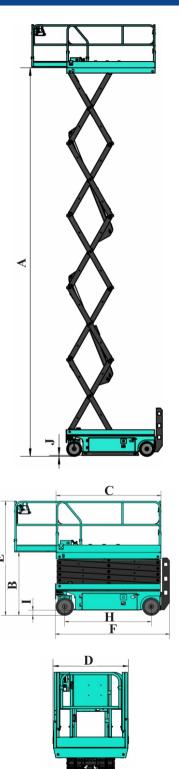

<sup>\*</sup> Working height is equal to Platform height plus 2.

<sup>\*\*</sup> climbing ability is suitable for driving on slopes; Refer to Operator Manual for slope level.

#### SWSL1212HD

### **Self-Propelled Scissor Lifts**



Standard features		
• Proportional controls	• Flashing beacon	
• Extended platform	• All motion alarm	
• Folding guardrails Platform	• Emergency stop button	
• Self-lock gate on platform	• Automatic brakes system	
• Emergency lowering system	• Active pothole protection system	
• Hour meter	• Tilt sensor with alarm	
• Safety brackets	• Charging protection system	
• Horn	Onboard diagnostic system	

#### **Accessories & Options**

- Air line to platform
- AC power to platform
- GPS tracking system
- Platform work lights
- Maintenance-free battery







